





MB5
Wall/Ceiling
Mounting Bracket
Installation Instructions



MB5 Wall/Ceiling Mounting Bracket Kit

The MB5 Wall/Ceiling Mounting Bracket Kit features robust brackets and hardware that allow for a Zx5 loudspeaker to be quickly and easily mounted to a wall or ceiling in almost any position to obtain the desired sound coverage.

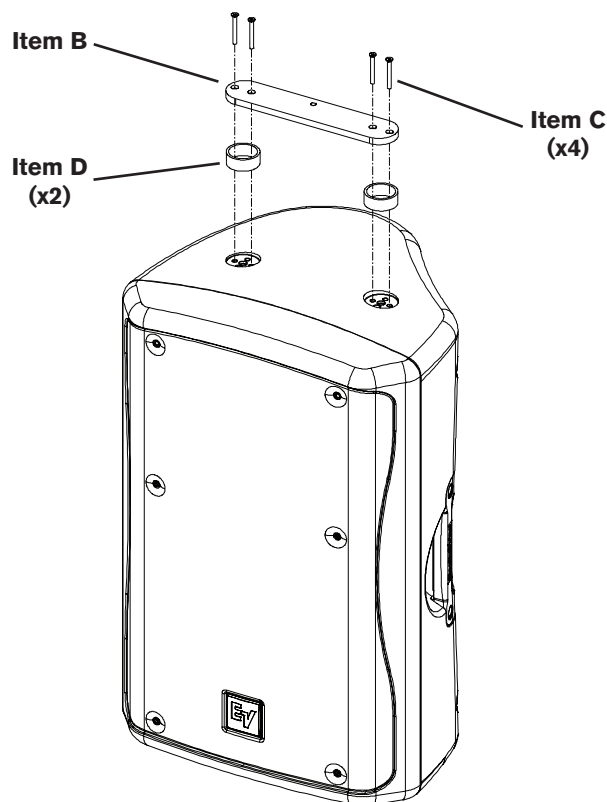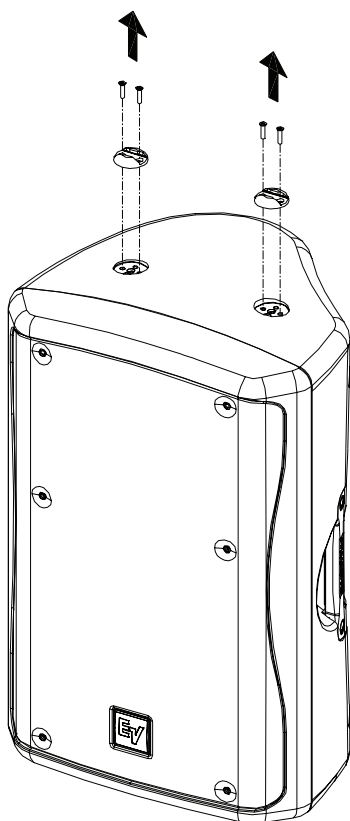

Step 1: Attach Spanning Bracket



Remove original Single-Stud Fittings by removing the four screws shown. Using the four screws (Item C) and two spacers (Item D) supplied, attach the spanning bracket (Item B) to the top of the speaker as shown above. **Orient the spanning bracket so that the center threaded hole is towards the rear of the speaker.**

MB5 Mounting Bracket Includes		
Item	Description	Qty.
A	U-Bracket Assembly	1
B	Spanning Bracket	1
C	Screw, 10-32 x 1-3/4", Flat Head	4
D	Spacer	2
E	Bolt, 5/16-18 x 1", Hex Head	1
F	Washer, 5/16	2
G	Insert, Pole Socket	1
H	Nut, Shakeproof, 5/16-18	1




Step 2: Attach Pole Socket Insert

With the stud facing away from the enclosure, align hole in side of Pole Socket Insert (Item G) with locking screw in pole socket on bottom of enclosure. Insert Pole Socket Insert all the way into pole socket and tighten locking screw. **Important: Locking screw must engage and bottom out in hole provided on side of Pole Socket Insert!**

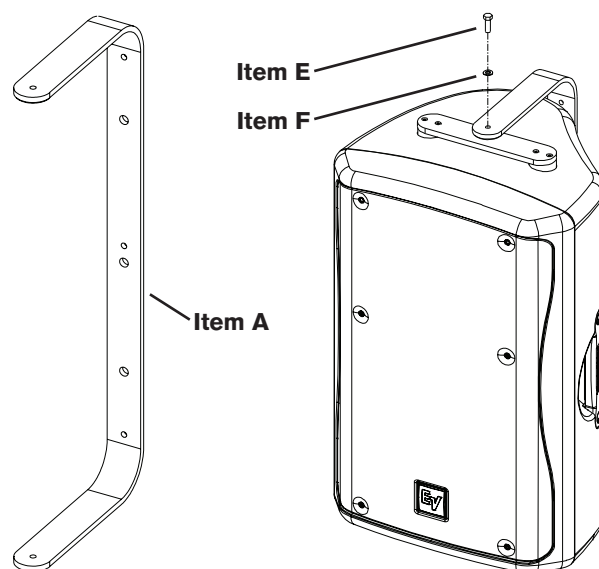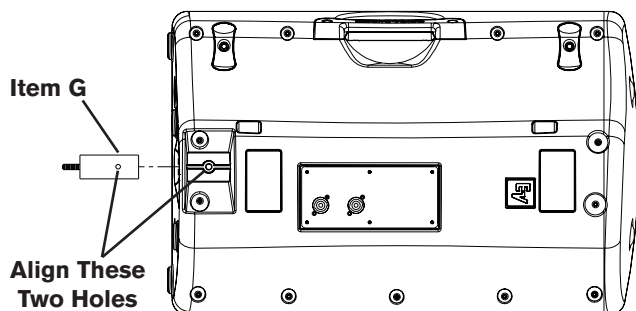

Step 3: Mounting the U-Bracket Assembly


Attach the U-Bracket (Item A) to the wall or ceiling using fasteners (not supplied) that are suitable for the construction materials the bracket will be fastened to (See dimension diagrams for mounting hole patterns and dimensions).



MB5 Top View Dimensions

Step 4: Mounting the Zx5 Loudspeaker

With the top of the Zx5 angled out slightly, lift the speaker into position and drop the stud of the previously installed Pole Socket Insert into the hole on the bottom (or left side) of the U-bracket. Slide the Spanning Bracket under the top (or right side) of the U-bracket, thread the 5/16 x 1" bolt and washer through the hole in the U-bracket into the threaded hole on the Spanning Bracket and tighten finger-tight. Place the remaining washer and 5/16" shakeproof nut on the Pole Socket Insert stud, connect the wiring and aim the loudspeaker. Evenly tighten the 5/16" nut and bolt at opposite ends of the U-bracket until the loudspeaker no longer rotates and double check your work.

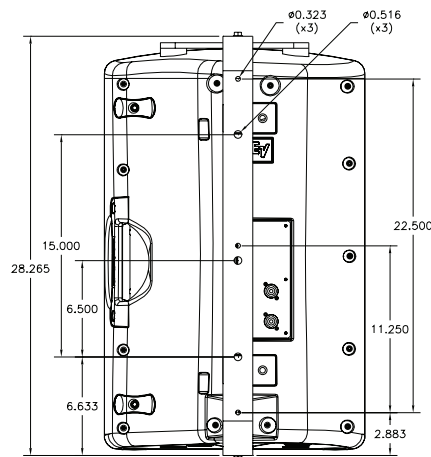

MB5 Rear View Dimensions



WARNING: Suspending any object is potentially dangerous and should only be attempted by individuals who have a thorough knowledge of the techniques and regulations of rigging objects overhead. Electro-Voice® strongly recommends that Zx5 speakers be suspended taking into account all current national, federal, state and local regulations. It is the responsibility of the installer to ensure that Zx5 speakers are safely installed in accordance with all such regulations. If Zx5 speakers are suspended, Electro-Voice® strongly recommends that the system be inspected at least once a year. If any sign of weakness or damage is detected, remedial action should be taken immediately. Please consult the Zx5 owner's manual, which details the various hardware kits that are available to safely suspend Zx5 speakers and how each kit should be used.

Electro-Voice®

12000 Portland Avenue South, Burnsville, MN 55337
Phone: 952/884-4051, Fax: 952/884-0043

www.electrovoice.com

© Bosch Communications Systems

01/2008

Part Number 38110-375 Rev C

U.S.A. and Canada only. For customer orders, contact Customer Service at:
800/392-3497 Fax: 800/955-6831

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:
+ 49 9421-706 0 Fax: + 49 9421-706 265

Other International locations. For customer orders, Contact Customer Service at:
+ 1 952 884-4051 Fax: + 1 952 887-9212

For warranty repair or service information, contact the Service Repair department at:
800/685-2606

For technical assistance, contact Technical Support at: 866/78AUDIO

Specifications subject to change without notice.