


EVERSE8 Accessory tray, 12V DC



Electro-Voice

- Secure mounting tray for wireless microphone receivers such as the Electro-Voice RE3 or R300, and other equipment such as tablets or smartphones.
- The hook and loop strap combined with integrated locating notches keep both microphone receivers and microphones secure.
- DC power cable included to power your RE3 or R300 receiver with the EVERSE 8's battery.
- Available in black and white.

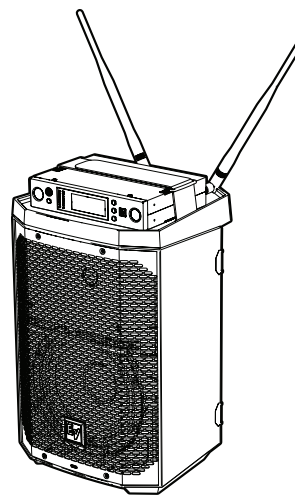

Technical specifications

Material	Polypropylene
Color	Black or white
Cable length (mm)	650 mm
Cable length (in)	19.7 in
Cable color	Black
Connector OD (mm)	5.5 mm
Connector ID (mm)	2.5 mm
Connector length (mm)	11 mm
Polarity	Center positive
Weight (kg)	0.4930 kg
Weight (lb)	1 lb
Shipping weight (kg)	0.81 kg
Shipping weight (lb)	1.80 lb
Dimensions (H x W x D) (mm)	60 mm x 274 mm x 271 mm
Dimensions (H x W x D) (in)	2.4 in x 10.74 in x 10.66 in
Shipping dimension (H x W x D) (mm)	310 mm x 330 mm x 88 mm
Shipping dimension (H x W x D) (in)	12.2 in x 13 in x 3.5 in

Dimensions

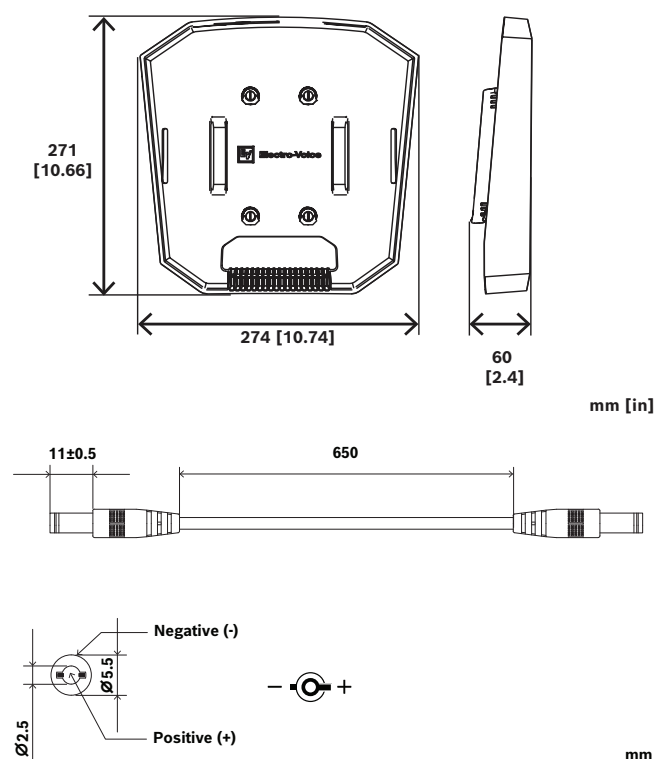


Fig. 1: EVERSE8 DC power cable measurements and polarity

Ordering information

EVERSE8-TRAY-B Tray for EVERSE 8, 12V DC cable black

Wireless microphone tray

Order number **EVERSE8-TRAY-B | F.01U.399.470**

EVERSE8-TRAY-W Tray for EVERSE 8, 12V DC cable

white

Wireless microphone tray

Order number **EVERSE8-TRAY-W | F.01U.399.471**

Represented by:

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.electrovoice.com

Bosch Security Systems, LLC
12000 Portland Avenue South
Burnsville MN 55337
USA